

**We serve the solution**

**temp-rite**

## **Temp-Contact**



**Energy-efficient meal regeneration**



[www.temp-rite.eu](http://www.temp-rite.eu)



CARE

# We serve the solution



CLINIC

temp-rite International is a partner you can rely on to deliver innovative and sustainable solutions in the field of meal distribution.

## temp-rite is double ISO-certified!

### Quality management:

Hospitals, old people's homes and other care-providing institutions attach great importance to the quality of the services and products their suppliers deliver. temp-rite's Quality Management System meets all the requirements set out in DIN EN ISO 9001.

### Ecological awareness:

temp-rite Germany also has DIN EN ISO 14001 environmental certification. This underlines just how seriously we take protecting the environment, and achieving a sustainable balance between commercial and ecological considerations.



# Temp-Contact by temp-rite

## Intelligent contact-heating technology

Temp-Contact carts utilize a unique type of contact-heating technology that can not only heat up meals prepared by the Cook-Serve method, but will also support streamlined operations involving the distribution of Cook-Chill meals. It can even regenerate entire Cook-Freeze meals.

This technology delivers excellent regeneration of individual meals. It enables the flexible distribution of meals in just about any conceivable scenario, regardless of how your food-service operations are organized. Core temperatures of approx. 75°C are guaranteed within 40 – 50 minutes.

Temp-Contact Carts accept GN trays (or, alternatively, up to

40 Mini-Trays), and can optionally be fitted with an active cooling system. The trays will hold a complete meal, including cold meal components. The cart will thus enable you to provide high-quality meals for large numbers of patients for a modest outlay. Its compact footprint and small turning circle will allow you to make optimum use of precious floor space.

The Temp-Contact control technology, which supports both centralized and decentralized meal regeneration, can be incorporated in the cart or in an external wall-mounted unit. The HACCP-compliant logging system has its own data interface; data transfers are via an Ethernet network or, optionally, a wireless connection.

### Economical

- Low energy requirement
- Cost-saving investment
- Compact footprint
- Low maintenance costs

### Practical design

- Straightforward programming
- Towing gear for efficient transport operations (option)
- ID-card system to direct carts to food-service locations (option)

### Ease of handling

- Vertical pushbars are easy on the user's back
- Easy to manoeuvre and push
- Clear view over the top of the cart

### Functionality

- Integrated or external control system (option)
- Icon-based cart operation
- Flexible placement of dishes

### Hygienic

- Interior entirely finished in stainless steel
- Simple to clean
- Meets HACCP requirements
- Active cooling option available

### Safety and reliability

- Designed to prevent operating errors
- Guarantees high-quality meals and service
- Can be moved safely from place to place

## temp-rite delivers optimized meal-distribution systems




### Easy-to-reach cooling and electronic components

= Easy-to-service with low maintenance overhead



### Reinforced guard rail with sturdy plastic corner pieces, laterally reinforced pushbars, and low-level surround bumper

= Cart, contents and surroundings all protected in every transport situation



### Integrated or (optionally) external control by means of symbol-based user interface and HACCP-compliant logging system

= Easy, error-free operation and readouts of HACCP-relevant data



### Doors finished in plastic on outside and stainless steel on inside

= Sandwich construction ensures good insulation and low weight while providing excellent protection from dents and scratches



### Stainless-steel cart interior, removable door seals, and walls with seamless, deep-drawn embossed ledges

= Optimum hygiene and ease of cleaning



## Features that only the Temp-Contact offers



### Double-walled and insulated doors and casing components

- = High static strength and rigidity
- = Efficient temperature maintenance



### Active static cooling (option)

- = Low maintenance requirement and noise emission
- = Safe storage of meal components before regeneration starts



### Overall height kept low, cart fitted with vertical pushbars

- = Ease of handling for users short and tall

### Contact heating of individual food items

Each of the heating elements has its own ITC (Integrated Thermo Control) thermostatically controlled heating system

- = Heating is applied in accordance with the quantity, consistency and initial temperature of each menu component. Overheated and dried up meals are a thing of the past.



### Energy efficient

Regeneration takes place in micro heating environment under the plate cover. Individual food items are regenerated – cold dishes stay cold, and empty tray levels remain deactivated

- = Specifically directed heat supply



### Hygienic

Door latches made of antibacterial plastic

- = Reduced risk of contact infections reaching surfaces constantly being touched by different persons




### Economical

In spite of its small footprint, the cart can regenerate up to 40 meals on Mini-Trays

- = Even though it takes up so little space, the cart's high load capacity makes it ideal for use even in large, busy wards



# Technical Data

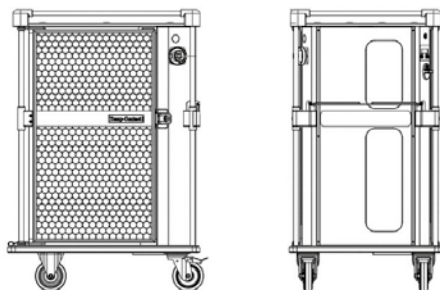

Temp-Contact	heated	neutral	Trays
<b>Model:</b>	TRTeCo - 16/093 TRTeCo - 20/093 TRTeCo - 24/093 TRTeCo - 40/090	TRTeCo - 16/000 TRTeCo - 20/000 TRTeCo - 24/000 TRTeCo - 40/000	16 GN-trays 20 GN-trays 24 GN-trays 40 Mini-Trays
<b>Footprint:</b>	approx. 790 x 995 mm (floor space heated) approx. 795 x 921 mm (floor space neutral)		
<b>Height:</b>	approx. 1,466 mm (16/20 GN-trays or 40 Mini-Trays) approx. 1,676 mm (24 GN-trays)		
<b>Turning circle:</b>	approx. 1,456 mm		
<b>Weight:</b>	approx. 175 kg (version for 16, 20 or 40 trays) approx. 205 kg (24-tray version)		
<b>Noise emission:</b>	approx. 52 dB (A)		
<b>Connected load (simultaneous refrigeration and regeneration):</b>	approx. 3.7 kW, 400 V – 3ph approx. 4.3 kW, 400 V – 3ph approx. 5.0 kW, 400 V – 3ph approx. 5.7 kW, 400 V – 3ph		16 GN-trays 20 GN-trays 24 GN-trays 40 Mini-Trays
<b>Refrigerant:</b>	Gas R452a (CFC-free), GWP = 2,141		
<b>Gas quantity:</b>	0.75 kg		
<b>Thermal Transmittance:</b>	U <sub>DOOR</sub> = 1.43 W/m²K U <sub>S-WALL</sub> = 0.875 W/m²K		
<b>Waste heat:</b>	3,200 Btu/h (940 W)		
<b>Climatic class:</b>	SN (= +10/+32°C) when cooling and regenerating systems are running simultaneously SN-ST (= +10/+38°C) with only cooling system running		
<b>Protection class:</b>	IPX5		

temp-rite International reserves the right to make alterations without notice.  
The illustrations in this brochure may show specialized set-ups or non-standard configurations. Date: 01/2020



GN-tray  
approx. 530 x 325 mm  
Height of set consisting of server and dome: 85 mm



Mini-Tray  
approx. 335 x 295 mm  
Height of set consisting of server and dome: 85 mm

## Germany & Luxembourg

temp-rite International GmbH  
Theodor-Barth-Str. 29  
D-28307 Bremen  
Phone: 04 21-4 86 92-0  
E-Mail: info@temp-rite.de

## The Netherlands

temp-rite International Holding B.V.  
Weidehek 64  
NL-4824 AS Breda  
Phone: 076-5 42 43 43  
E-Mail: info@temp-rite.nl

## Belgium

temp-rite International  
Gemeenteplaats 31  
BE-2960 Brecht  
Phone: 03-3 15 94 65  
E-Mail: info@temp-rite.be

## Hungary

temp-rite International Kft.  
Krisztina Krt. 83 - 85  
H-1016 Budapest  
Phone: (1) 212-70 43  
E-Mail: sk@temprite.t-online.hu

an Ali Group Company



The Spirit of Excellence